



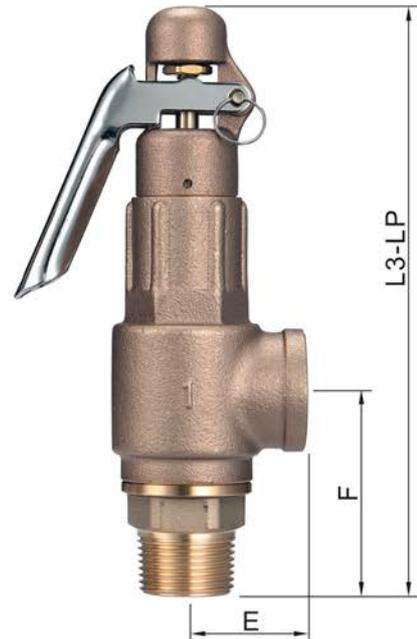

# 青(砲金)銅安全閥 BRONZE SAFETY VALVES

## L3P 密閉式 Sealing 1/2"~2"

## L3-LP 手拉式 Lever 1/2"~2"

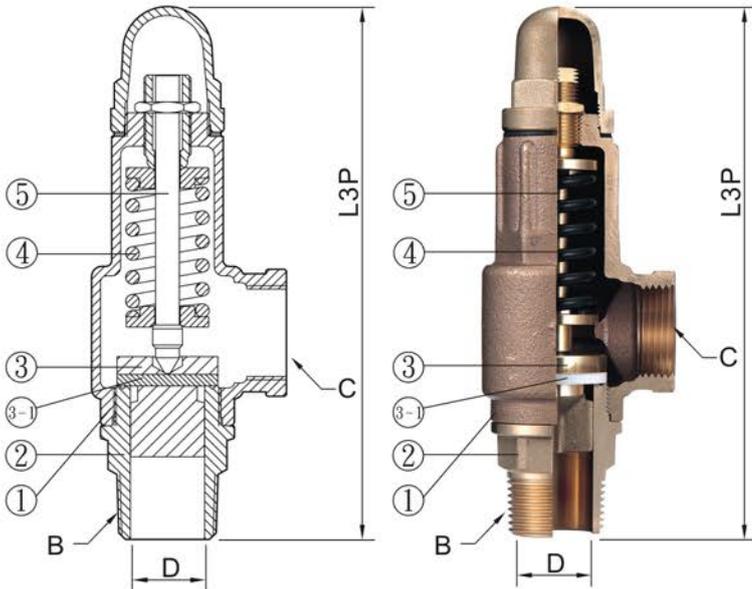

### 尺寸表 Dimensions

(密閉式 Sealing)

單位 Unit:mm

(手拉式 Lever)

單位 Unit:mm

項目 Item	入口 Inlet	出口 Outlet	閥座徑 Valve seat orifice	揚程 Lift	重量 Wt. kg	尺寸 Size		重量 Wt. kg
						L3P	B	
1/2"	138	1/2"	1/2"	13	29	50	0.52	0.52
3/4"	149	3/4"	3/4"	19	36	58	0.76	0.66
1"	181	1"	1"	25	40	70	1.00	1.09
1-1/4"	207	1-1/4"	1-1/4"	32	50	82	1.28	1.90
1-1/2"	231	1-1/2"	1-1/2"	38	54	93	1.52	2.35
2"	266	2"	2"	50	67	102	2.00	3.85

### 材質表 General Material

序號 NO.	零件 Parts Name	型式 Model	L3P 密閉式 Sealing	L3-LP 手拉式 Lever
1	閥體 Valve Body		Cast Bronze 青(砲金)銅	
2	閥座 Valve Seat		Forging Brass (鍛造黃銅)	
3	閥盤 Disc		Forging Brass (鍛造黃銅)	
3-1	軟墊 Soft Seal		Teflon (PTFE)	
4	彈簧 Spring		Steel (鋼)	
5	閥桿 Stem		Brass (黃銅)	
使用壓力 Working Pressure			10 kgf/cm <sup>2</sup>	
使用溫度 Working Temp			-45 °C~185 °C	
使用流體 Working Fluid			非腐蝕性氣體、非腐蝕性液體、 空氣、蒸氣、水、油 Noncorrosive Gas、Noncorrosive Liquid、 Air、Steam、Water、Oil	非腐蝕性氣體、空氣、蒸氣 Noncorrosive Gas、Air、Steam